



10/15/99

Express Mail No.: EL356872801US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. 11032RR
 Assistant Commissioner for Patents
 Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

For: PORTABLE CALL MANAGEMENT SYSTEM

JC503 U.S. PTO
 09/419175
 10/15/99

Enclosed are also:

X 24 Pages of Specification including an Abstract
X 14 Pages of Claims
X 10 Sheet(s) of Drawings
X A Declaration and Power of Attorney

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$760)
Total Claims	69	-20 =	49	X	\$ 18	=	\$882.00
Independent Claims	10	-3 =	7	X	\$ 78	=	\$546.00
Multiple Dependent Claims	0			X	\$260	=	\$0
Total Filing Fee							= \$2,188.00

X A check in the amount of \$2,188.00 is enclosed for the filing.X The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to Carstens, Yee & Cahoon, Deposit Account No. 50-0392. A duplicate copy of this sheet is enclosed.X Any additional filing fees required under 37CFR § 1.16.X Any patent application processing fees under 37CFR § 1.17.

Respectfully,

Stephen R. Loe

Registration No. 43,757

CARSTENS YEE & CAHOON, LLP

P.O. Box 802334

Dallas, Texas 75380

(972) 367-2001

ATTORNEY FOR APPLICANT

Docket No. 11032RR

PORTABLE CALL MANAGEMENT SYSTEM5 **1. Field of the Invention:**

The present invention relates to telecommunications systems and, more specifically, to methods of transferring calls real time from one device to another.

2. Background of the Invention:

10 Historically, when a caller telephoned a party, if the party to which the caller wished to speak with did not answer the phone or if the line was busy, the caller had to hang up and redial at a later time hoping that the second call would reach the intended party. Often times, the caller would need to attempt to contact the party multiple times in order to reach that party. If the caller had urgent
15 information in which time was of the essence, this method was unsatisfactory and often resulted in the intended party missing important business or other opportunities.

Some of these problems were alleviated with the introduction of answering machines and voice mail systems. However, even these solutions were not
20 completely satisfactory. For instance, utilizing answering machines and voice mail systems required the called party to actively retrieve their messages. Thus, either many important messages were still not received in a timely manner if the called party did not retrieve their messages frequently or the called party was required to check their voice mail or answering machine quite frequently when the
25 party was out of the office or home in order to insure that messages were retrieved quickly. Thus, this results in the same problem as having the caller repeatedly call the intended party, except that in this case it is the called party that must waste its time insuring that no messages are missed.

A more recent solution to this problem is the introduction of subscriber's
30 static reach list. A static reach list enabled a subscriber (i.e., called party) to enter a list of telephone numbers (or IP addresses, etc.) where the subscriber might be reached. The subscriber would enter these numbers in the order of preference in

Docket No. 11032RR

which the subscriber wished the telecommunications system to try to reach the subscriber. Therefore, if the subscriber were going to be away from the location of the subscriber's normal telephone number, if a call were received for the subscriber, the telecommunications system would redirect the subscriber's calls to
5 the next number on the static reach list until the subscriber were reached or until the list of numbers was exhausted.

However, this method required the subscriber to know in advance the telephone number or other communications address at which the subscriber would be while traveling. Many times such information is unknowable either because
10 the person does not know a number at the location to which they are travelling or because the person does not know sufficiently in advance where they will be in order to update the static reach list with the appropriate number. Therefore, it would be beneficial to have a method of to prevent a called party from missing calls without being required to know the number of a phone at which they will be
15 in advance.

Docket No. 11032RR

SUMMARY OF THE INVENTION

5 The present invention solves the problem of preventing a called party from missing calls without having to know in advance the number at which they will be by providing a method and apparatus for redirecting a call from a data processing system to another address. In a preferred embodiment, a notice of an incoming call received from a server at a data processing system. This notice may include caller identification information as well. The user of the data processing system is
10 prompted for an address to which the user wishes the call to be redirected. The user then identifies and sends to the server a new address to which the incoming call is to be redirected.

In another aspect of the present invention, an SIP server receives a notice of a call and forwards the notice to a SIP user agent. The SIP proxy server then
15 identifies the address to which the called party wishes the call sent from a database of preferred locations. The called party has previously registered their preferred location to this database. The SIP user agent then sends a message to the called party that they have an incoming call. The called party then identifies a phone number or IP address to which the called party wishes the call to be
20 redirected. Thus, the called party can have their calls originally directed to their handheld personal digital assistant or other data processing device. Thus, when a call is received, the called party can determine at that time how to dispose of the call.

Other aspects and features of the present invention will become apparent
25 to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

Docket No. 11032RR

BRIEF DESCRIPTION OF THE DRAWINGS

5 The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

10 **Figure 1** depicts a block diagram illustrating a communications network in which the present invention may be implemented;

Figure 2 depicts a block diagram of a data processing system which may be implemented as a server in accordance with the present invention;

15 **Figure 3** depicts a block diagram of a portable device such as a personal digital assistant (PDA) in which the present invention may be implemented;

Figure 4 depicts a block diagram of a data processing system in which the present invention may be implemented;

Figure 5 depicts a message flow chart illustrating the processes of redirecting a call in real time from according to the present invention;

20 **Figures 6A-6E** illustrate examples of sample HTML or web pages displayed to a user of a portable computing device;

Figure 7 depicts a flowchart illustrating the methods executed on a portable computing device in accordance with a preferred embodiment of the present invention;

25 **Figure 8** depicts a flowchart illustrating the processes of redirecting a call which are implemented on a server within the communications network in accordance with the present invention;

Figure 9 depicts a flowchart illustrating a method of converting HTML to SIP as performed by a SIP User Agent in accordance with the present invention;

30 and

Docket No. 11032RR

Figure 10 depicts a flowchart illustrating a method of converting an SIP signal into an HTML message in accordance with the present invention.

Docket No. 11032RR

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5

With reference now to the figures, and in particular with reference to **Figure 1**, a system diagram illustrating a plurality of interconnected heterogeneous networks in which the present invention may be implemented is depicted. As illustrated, an Internet Protocol (IP) network **102**, a Local Area Network (LAN) / Wide Area Network (WAN) **104**, the Public Switched Telephone Network (PSTN) **109**, a cellular wireless network **112**, and a satellite communication network **116** make up the plurality of heterogeneous networks serviced by the personal mobility system of the present invention.

10

IP network **102** may be the publicly available IP network, a private IP network, or a combination of public and private IP networks. In any case, IP network **102** operates according to the Internet Protocol and routes packets among its many switches and through its many transmission paths. IP networks are generally known in the art to be expandable, fairly easy to use and heavily supported. Coupled to IP network **102** is a Domain Name Server (DNS) **108** to which queries may be sent, such queries each requesting an IP address based upon a Uniform Resource Locator (URL). IP network **102** supports 32 bit IP addresses as well as 128 bit IP addresses, which are currently in the planning stage.

15

20

LAN/WAN **104** couples to IP network **102** via a proxy server **106** (or another connection). LAN/WAN **104** may operate according to various communication protocols, such as the Internet Protocol, the Asynchronous Transfer Mode (ATM) protocol, or other known packet switched protocols. Proxy server **106** serves to route data between IP network **102** and LAN/WAN **104**. A firewall that precludes unwanted communications from entering LAN/WAN **104** may also be located at the location of proxy server **106**.

25

30

Computer **120** couples to LAN/WAN **104** and supports communications with LAN/WAN **104**. Computer **120** may employ the LAN/WAN and proxy

Docket No. 11032RR

server **106** to communicate with other devices across IP network **102**. Such communications are generally known in the art and will not be further described herein except to expand upon the teachings of the present invention. As is also shown, phone **122** couples to computer **120** and may be employed to initiate IP
5 Telephony communications with another phone or voice terminal using IP Telephony. In such an IP telephony system, a gatekeeper **152** is deployed by a service provider to manage IP telephony for its users. An IP phone **154** connected to IP network **102** (or other phone, e.g., phone **124**) may communicate with phone **122** using IP telephony.

10 PSTN **109** is a circuit switched network that is primarily employed for voice communications, such as those enabled by a standard phone **124**. However, PSTN **109** also supports the transmission of data. Data transmissions may be supported to a tone based terminal, such as a FAX machine **125**, to a tone based modem contained in computer **126**, or to another device that couples to PSTN **109**
15 via a digital connection, such as an Integrated Services Digital Network (ISDN) line, an Asynchronous Digital Subscriber Line (ADSL), or another digital connection to a terminal that supports such a connection. As illustrated, a voice terminal, such as phone **128**, may couple to PSTN **109** via computer **126** rather than being supported directly by PSTN **109**, as is the case with phone **124**. Thus,
20 computer **126** may support IP telephony with voice terminal **128**, for example.

Cellular network **112** supports wireless communications with terminals operating in its service area (which may cover a city, county, state, country, etc.). As is known, cellular network **112** includes a plurality of towers, e.g., **130**, that each service communications within a respective cell. Wireless terminals that
25 may operate in conjunction with cellular network **112** include wireless handsets **132** and wirelessly enabled laptop computers **134**, for example. Wireless handsets **132** could be, for example, personal digital assistants, wireless or cellular telephones, or two-way pagers. Cellular network **112** couples to IP network **102** via gateway **114**.

30 Wireless handsets **132** and wirelessly enabled laptop computers **134** may communicate with cellular network **112** using a wireless application protocol

Docket No. 11032RR

(WAP). WAP is an open, global specification that allows mobile users with wireless devices, such as, for example, mobile phones, pagers, two-way radios, smartphones, communicators, personal digital assistants, and portable laptop computers, to easily access and interact with information and services almost
5 instantly. WAP is a communications protocol and application environment and can be built on any operating system including, for example, Palm OS, EPOC, Windows CE, FLEXOS, OS/9, and JavaOS. WAP provides interoperability even between different device families.

WAP is the wireless equivalent of Hypertext Transfer Protocol (HTTP)
10 and Hypertext Markup Language (HTML). The HTTP-like component defines the communication protocol between the handheld device and a server or gateway. This component addresses characteristics that are unique to wireless devices, such as data rate and round-trip response time. The HTML-like component, Wireless Markup Language (WML), defines new markup and scripting languages for
15 displaying information to and interacting with the user. This component is highly focused on the limited display size and limited input devices available on small, handheld devices. For example, a typical cell phone may have only a 4x10-character display with 16-gray levels and only a numeric keypad plus up/down volume keys.

20 Cellular network **112** operates according to an operating standard, which may be the Advanced Mobile Phone System (AMPS) standard, the Code Division Multiple Access (CDMA) standard, the Time Division Multiple Access (TDMA) standard, or the Global System for Mobile Communications or Groupe Speciale Mobile (GSM), for example. Independent of the standard(s) supported by cellular
25 network **112**, cellular network **112** supports voice and data communications with terminal units, e.g., **132** and **134**.

Satellite network **116** includes at least one satellite dish **136** that operates in conjunction with a satellite **138** to provide satellite communications with a plurality of terminals, e.g., laptop computer **142** and satellite handset **140**.
30 Satellite handset **140** could also be a two-way pager. Satellite network **116** may be serviced by one or more geosynchronous orbiting satellites, a plurality of

Docket No. 11032RR

medium earth orbit satellites, or a plurality of low earth orbit satellites. In any case, satellite network **116** services voice and data communications and couples to IP network **102** via gateway **118**.

Wireless Proxy **160** is coupled to IP network **102** and is coupled to a plurality of towers, e.g., **162**, which each provide wireless communications with wireless devices such as wireless device **164**. Wireless Proxy **160** provides access to IP network **102** to wireless device **164**, such as personal digital assistants (PDAs), that may require proprietary or other special protocols in order to communicate with IP network **102**. For example, wireless proxy server **160** may be a 3Com server utilizing 3Com protocols for communicating with a Palm VII, a handheld portable computing device available from 3Com Corporation in Santa Clara, California.

In a preferred embodiment of the present invention, wireless proxy **160** is a 3Com proxy server supporting communications with Palm VII personal organizer and portable computing device **164** is a Palm VII personal organizer. In this embodiment, communications between wireless proxy server **160** and portable computing device **164** is facilitated by the use of Palm Query Applications (PQAs). A PQA is like a mini-Web site that resides on portable computing device **164**. That is, a PQA is a special kind of record database. A typical PQA contains an HTML form or a list of hyperlinks that request additional information either locally — on personal computing device **164** — or remotely — on the Internet.

Much of the content on the Internet is designed to take advantage of the power of Pentium/RISC-class computers with large, high resolution color monitors and fast and cheap Internet access. In these circumstances, there is little reason to economize on the abundant connect time and large file size that make Web browsing such a rich, multimedia experience from a desktop or notebook computer.

However, this model is not the best model for a small, low-power computer like the Palm VII organizer with its tiny screen, battery powered operation, and relatively slow and expensive wireless connection to the Internet.

Docket No. 11032RR

Rather than duplicate the Web browsing model on a handheld computer, PQAs are developed that access targeted bits of Internet information — like clippings from a newspaper. Typically, a handheld computer user does not focus on following hyperlinks to the Internet (although this is available), but instead, they
5 compose a simple query in the PQA (for example a request for a stock quote) and then send that query over the air.

Also included in network **100** is a Session Initiation Protocol (SIP) proxy **170**. SIP proxy **170** is connected to IP network **102** and provides switching and routing for communication over IP network **102**. SIP proxy **170** also maintains a
10 static list of preferred locations to which a user wishes telephone calls or other communication types sent. When a request to initiate a communications session is received, SIP proxy **170** retrieves the static list of the called party and routes the call to the top address in the static list. If the communications session is not established with the top address in the static list, then SIP proxy **170** may attempt
15 to access the next address in the list and so on until the called party is reached or until the addresses in the static list are exhausted.

SIP is a textual based signaling protocol for creating, modifying and terminating sessions. These sessions can be multimedia conferences, Internet telephone calls and similar applications consisting of one or more media types
20 such as, for example, audio, video, or whiteboard. SIP invitations are used to create sessions and carry session descriptions, which allow participants to agree on a set of compatible media types. SIP requests can be sent either over TCP or UDP.

SIP User Agent **172** is also connected with IP Network **102**. SIP User
25 Agent **172** translates between SIP communications and Hypertext Transfer Protocol (HTTP) and other extensible markup language (XML) based protocols such as Voice XML (VOXML) and Wireless Application Protocol (WAP).

Figure 1 is intended as an example and not as an architectural limitation for the processes of the present invention.

30 In a preferred embodiment, a user registers an address to which they wish their voice calls or other communications to be sent. The address can be an IP

Docket No. 11032RR

address, a PSTN address or other type of address for locating an electronic device such as a data processing system or telephone. As an example, consider a user of portable device **164** wishing to have all of their calls routed to the portable device. The user of portable device **164** sends an HTML registration request to Wireless
5 Proxy **160**, which then forwards the HTML registration request to SIP User Agent **172**. SIP User Agent **172** translates the HTML registration request from HTML into an SIP registration statement and sends the SIP registration statement to SIP Proxy **170**. SIP Proxy **170** then updates the user's static list and inserts the newly received address into the top of the static list as the first address to attempt
10 to establish a connection with if a request to initiate communications with that user is received. If the user does not have a static list, SIP Proxy **170** can create one and then place the received address in the newly created static list. The registration request does not have to initiate from a portable wireless device such as portable device **164** but may initiate with a LAN based data processing system
15 such as client **120** or with some other type of wireless device.

When SIP Proxy **170** receives a request to initiate communications, such as a voice telephone call, with a user, SIP Proxy **170** retrieves the static list for the called party and determines the first address to contact. SIP Proxy **170** then sends an SIP Invite message to SIP User Agent **172**. SIP User Agent **172** translates the
20 SIP Invite message into an HTML message and sends the HTML message to Wireless Proxy **160** which then forwards the HTML message to portable device **164**.

Once the HTML invite message is received at portable device **164**, the user may then determine how to dispose of the call. If portable device **164** is a
25 telephone (or supports voice communications), the user may choose to take the call if it is someone to which the user wishes to speak. The user may also redirect the call elsewhere to a nearby PSTN address, to a voice mailbox, or to an IP address. Portable device **164** may even suggest options as to disposal of the incoming communication. For example, if the incoming communication is video,
30 rather than a voice call, portable device **164** may suggest routing the

Docket No. 11032RR

communication to client **120** on LAN/WAN **104**, which may be the nearest device capable of receiving such communication.

If the user decides to redirect the call to some other device, then redirection information in HTML format indicating the address of the new device is sent from portable device **164** to wireless proxy **160**. Wireless proxy **160** then forwards the HTML redirect information to SIP User Agent **172**, which converts the HTML redirect information into an SIP redirect and send the SIP redirect to SIP proxy **170**. SIP User Agent **172** also sends an HTML notification to portable device **164** via wireless proxy **160** indicating that the communication is being redirected. SIP proxy **170** then redirects the communication to the new address and takes down the connection with portable device **164**. If SIP proxy **170** is unable to make a connection with the new address (e.g., incorrect address, device off-line, etc.), then the communication must be terminated or the next address in the user's static list contacted. This is because the connection to portable device **164** has already been taken down thus preventing an attempt to request a new address to which to redirect the communication.

As an example of uses of such redirection methods and systems according to the present invention, consider a family consisting of a husband, wife, and children. Perhaps the husband has registered his wireless telephone as the device to which incoming calls to his home telephone should be delivered. If notification of an incoming call is received by the husband on his wireless telephone, he can look at the display to see who the caller is. If the husband determines that the call is for his wife, he can redirect the call to her work phone or to her wireless phone. If the call is for one of the children, the call can be redirected to the home phone. However, if the call is for the husband, he can choose to take the call on his wireless telephone. Alternatively, if the call is for the husband, but he does not wish to speak with the caller, the call can be forwarded to his voice mailbox.

As another example of the use of redirection methods and systems according to the present invention, consider a person travelling on business and away from the office. The business person can register a personal digital assistant (PDA) as the device to which incoming calls are directed. Thus, wherever the

Docket No. 11032RR

business person is, no calls will be missed because of being away from the office. If notification of a call is received, the business person can have the call redirected to a phone near where the business person is presently located. Such phone could be the room phone of the hotel where the person is currently staying or it could be the office phone of the person with which the business person is meeting.

Referring now to **Figure 2**, a block diagram of a data processing system which may be implemented as a server, such as server **106**, **108**, **160**, or **170** in **Figure 1**, is depicted in accordance with the present invention. Data processing system **200** may be a symmetric multiprocessor (SMP) system including a plurality of processors **202** and **204** connected to system bus **206**. Alternatively, a single processor system may be employed. Also connected to system bus **206** is memory controller/cache **208**, which provides an interface to local memory **209**. I/O bus bridge **210** is connected to system bus **206** and provides an interface to I/O bus **212**. Memory controller/cache **208** and I/O bus bridge **210** may be integrated as depicted.

Peripheral component interconnect (PCI) bus bridge **214** connected to I/O bus **212** provides an interface to PCI local bus **216**. A number of modems **218-220** may be connected to PCI bus **216**. Typical PCI bus implementations will support four PCI expansion slots or add-in connectors. Communications links to network computers **120**, **126**, **134**, and **142** in **Figure 1** may be provided through modem **218** and network adapter **220** connected to PCI local bus **216** through add-in boards.

Additional PCI bus bridges **222** and **224** provide interfaces for additional PCI buses **226** and **228**, from which additional modems or network adapters may be supported. In this manner, server **200** allows connections to multiple network computers. A memory mapped graphics adapter **230** and hard disk **232** may also be connected to I/O bus **212** as depicted, either directly or indirectly.

Those of ordinary skill in the art will appreciate that the hardware depicted in **Figure 2** may vary. For example, other peripheral devices, such as optical disk drives and the like, also may be used in addition to or in place of the hardware

Docket No. 11032RR

depicted. The depicted example is not meant to imply architectural limitations with respect to the present invention.

The data processing system depicted in **Figure 2** may be, for example, an IBM RS/6000, a product of International Business Machines Corporation in Armonk, New York, running the Advanced Interactive Executive (AIX) operating system.

Turning now to **Figure 3**, a block diagram of a personal digital assistant (PDA), such as portable device **164** in **Figure 1**, is illustrated in which the present invention may be implemented. The PDA is typically a palmtop computer, such as, for example, a Palm VII, a product of 3Com Corporation in Santa Clara, California, connected to a wireless communications network and which may provide voice, fax, e-mail, and/or other types of communication. The PDA **300** may have one or more processors **302**, such as a microprocessor, a main memory **304**, a disk memory **306**, and an I/O **308** such as a mouse, keyboard, or pen-type input, and a screen or monitor. The PDA **300** may also have a wireless transceiver **310** connected to an antenna **312** configured to transmit and receive wireless communications. The processor **302**, memories **304**, **306**, I/O **308**, and transceiver are connected to a bus **304**. The bus transfers data, i.e., instructions and information, between each of the devices connected to it. The I/O **308** may permit faxes, e-mail, or optical images to be displayed on a monitor or printed out by a printer. The I/O **308** may be connected to a microphone **316** and a speaker **318** so that voice or sound information may be sent and received.

With reference now to **Figure 4**, a block diagram of a data processing system in which the present invention may be implemented is illustrated. Data processing system **400** is an example of a client computer such as client **120**, **126**, **134**, or **142** in **Figure 1**. Data processing system **400** employs a peripheral component interconnect (PCI) local bus architecture. Although the depicted example employs a PCI bus, other bus architectures, such as Micro Channel and ISA, may be used. Processor **402** and main memory **404** are connected to PCI local bus **406** through PCI bridge **408**. PCI bridge **408** may also include an integrated memory controller and cache memory for processor **402**. Additional

Docket No. 11032RR

connections to PCI local bus 406 may be made through direct component interconnection or through add-in boards. In the depicted example, SCSI host bus adapter 412 and expansion bus interface 414 are connected to PCI local bus 406 by direct component connection. In contrast, audio adapter 416, graphics adapter 418, and audio/video adapter (A/V) 419 are connected to PCI local bus 406 by add-in boards inserted into expansion slots. Expansion bus interface 414 provides a connection for a keyboard and mouse adapter 420, modem 422, and additional memory 424. In the depicted example, SCSI host bus adapter 412 provides a connection for hard disk drive 426, tape drive 428, CD-ROM drive 430, and digital video disc read only memory drive (DVD-ROM) 432. Typical PCI local bus implementations will support three or four PCI expansion slots or add-in connectors.

An operating system runs on processor 402 and is used to coordinate and provide control of various components within data processing system 400 in **Figure 4**. The operating system may be a commercially available operating system, such as OS/2, which is available from International Business Machines Corporation. "OS/2" is a trademark of International Business Machines Corporation. An object oriented programming system, such as Java, may run in conjunction with the operating system, providing calls to the operating system from Java programs or applications executing on data processing system 400. Instructions for the operating system, the object-oriented operating system, and applications or programs are located on a storage device, such as hard disk drive 426, and may be loaded into main memory 404 for execution by processor 402.

Those of ordinary skill in the art will appreciate that the hardware in **Figure 4** may vary depending on the implementation. For example, other peripheral devices, such as optical disk drives and the like, may be used in addition to or in place of the hardware depicted in **Figure 4**. The depicted example is not meant to imply architectural limitations with respect to the present invention. For example, the processes of the present invention may be applied to multiprocessor data processing systems.

Docket No. 11032RR

Turning now to **Figure 5**, a message flow chart is depicted illustrating the processes of redirecting a call in real time from a wireless device according to the present invention. In this example, a redirect from a wireless device utilizing a wireless proxy is illustrated. A similar flow would result if the redirect were being sent from a LAN/WAN connected device except for the omission of wireless proxy 508.

A user of a portable computing device such as a PDA or laptop computer initiates a registration by entering a proxy ID, a proxy port, and an address, such as, for example, a PSTN number or an IP address, and sending this information to wireless proxy 508 (step M01). **Figures 6A** illustrates an example of a sample HTML screen displayed to a user to initiate registration. The user may pull up the registration page by selecting the word "register" 601 on the page. **Figure 6B** illustrates an example of a sample HTML screen allowing a user to register by providing prompts to enter an user name 602, a proxy identification 604, and a proxy port 606.

Wireless Proxy 508 receives the HTML registration web page and forwards it to SIP user agent 506 (step M02). User agent 506 receives the HTML page and sends a SIP registration to SIP proxy 502 (step M03). SIP proxy 502 updates its destination list for the user with the address for portable computing device 510. Next, an SIP invite signal is sent to user agent 506 (step M04).

User agent 506 then sends an SIP 100-trying signal back to SIP proxy 502 (step M05). When a call for the user at portable computing device 510 is received by user agent 506, user agent 506 sends an HTML page to 3Com proxy 508 to indicate an incoming call for the user at portable computing device 510 (step M06). 3Com proxy 508 forwards the HTML page to portable computing device 510 (step M07). The HTML page is displayed the user of portable computing device 510 to indicate that the user has an incoming call. An example of such an HTML page is illustrated in **Figure 6C**. A hot button 608 is supplied which the user may select to redirect the incoming call. Other hot buttons 614, 616, and 618 allow the user to place the call on hold, terminate the call without answering, or send the call to voice mail respectively. If redirection is chosen, the user of the

Docket No. 11032RR

portable computing device **510** then redirects the call to another destination by entering and sending a PSTN, IP, or other address as the new destination (step **M08**). **Figure 6D** illustrates an example of a sample HTML page in which the user may enter the new destination for the incoming phone call in destination box **610** and then send the new destination by selecting the “submit” hot button **612**.

Wireless proxy **508** receives the HTML page containing the new destination and this page is forwarded to user agent **506** (step **M09**). User agent **506** sends a SIP 300 signal to SIP proxy **502** containing the new destination (step **M10**). User agent **506** also sends an HTML page to portable computing device **510** via 3Com proxy **508** indicating that the call was redirected (step **M11**). A message is displayed to the user of portable computing device **510** indicating that the call was redirected. An example of such a HTML page is illustrated in **Figure 6E**. SIP proxy **502** receives the 300 signal and sends out an invite to the new destination (step **M12**).

If portable computing device **510** does not respond to the message indicating that the user has an incoming call (step **M07**), then a SIP 480 Temporarily not available signal is sent from user agent **506** back to SIP proxy server **502**. SIP proxy **502** can then decide how to process the call. For example, for calls to which the portable computing device does not respond, SIP proxy **502** could forward the call to a predefined destination or take the call down.

Turning now to **Figure 7**, a flowchart illustrating the methods executed on a portable computing device in accordance with a preferred embodiment of the present invention is depicted. To start, a user of a data processing device registers the address of their data processing device that they wish their calls to be delivered to (step **702**). Typically, when the data processing device is activated, it performs an SIP registration with a SIP registration server, effectively causing all future calls to route to this device as the first selection. On deactivation of the device, the shutdown processing unregisters with the SIP registration server thereby restoring the defaults on how the called party is to be reached (i.e., the subscriber’s static reach list). Next, when a call is made to the user, a notification of the incoming call is received at their data processing device (step **704**).

Docket No. 11032RR

Included in the notification may be caller identification information such as PSTN or IP address from where the call originated. The user then identifies a new destination for the incoming call to be sent (step 706). For example, if the user has traveled to a hotel, the user may enter the phone number of the room at the hotel. As another example, if the user is near a pay phone, the user may enter the phone number of the pay phone. Once the user has identified a new destination for the incoming call to be redirected to, this new destination is sent back to a SIP proxy via a SIP User Agent (step 708). Once the SIP User Agent receives the redirect request, the user will receive a notice indicating the call is being redirected (step 710).

Turning now to **Figure 8**, a flowchart illustrating the processes of redirecting a call which are implemented on a server within the communications network is depicted in accordance with the present invention. To start, a server within the communications network receives a request for call initiation from a PSTN (step 802). The server accesses a database to which the called party has registered the current device to which they wish their calls directed (step 804). The current device is registered at the top of a static reach list of numbers to try in order to reach the called party. Once the current device is identified, a notice is sent to the called parties current location indicating that the party has an incoming call and requesting information about where to direct the call (step 806). Next, a determination is made as to whether the user has responded to the request (step 808). If the user does not respond after a given period of time, then the call is disposed of according to a predetermined procedure (step 810). For example, if the user does not respond to the request, then the server may redirect the call to the next address in the called party's static reach list of preferred locations or if there are no more preferred locations stored in a database, the server may end the call. If the user does respond to the request, then the call is redirected to the new location and a confirmation is sent to the user indicating such (step 812). The call may be redirected to a cell phone, to a nearby wire-line device, to the called party's voice mailbox, or the party initiating the call may be placed on temporary hold. If the party initiating the call is placed on hold, a standard greeting will be

Docket No. 11032RR

sent to the calling party to make them aware that the called party is attempting to find an appropriate method to receive the call or is on another call and to stay on the call because the called party will answer momentarily.

Turning now to **Figure 9**, a flowchart illustrating a method of converting HTML to SIP as performed by a SIP User Agent is depicted in accordance with the present invention. To start, a SIP User Agent receives an HTML message (step **902**). The SIP User Agent then parses the HTML message for class and content (step **904**). The SIP User Agent then analyzes the message class and content (step **906**) to create an SIP signal from the HTML message (step **908**). The newly formed SIP signal is then sent to an SIP Proxy (step **910**) and the process stops.

Turning now to **Figure 10**, a flowchart illustrating a method of converting an SIP signal into an HTML message is depicted in accordance with the present invention. First, the SIP User Agent receives an SIP signal from the SIP Proxy (step **1002**). The SIP signal is then parsed for message type (step **1004**) and the content, calling party, and called party are extracted from the SIP signal (step **1006**). Using the extracted information, the SIP User Agent generates an appropriate HTML page (step **1008**) and sends the HTML message to the called party (step **1010**) ending the process.

Although the present invention has been described primarily with reference to redirecting telephony communications. Other forms of media streams may be redirected as well. For example, a client such as client **120** or portable device **164**, that has previously performed an SIP registration, receives a notification of incoming data streams. The notification will include information about what types of data streams are included. This will be encoded into the notification at either SIP Proxy **170** or at User Agent **172**. The notice displayed to the user will inform the user of whether there are multiple types of data streams and what types of data streams are in the incoming communication. Once the notification is displayed to the user of the client, the client may then decide how to dispose of the incoming data streams. If the user selects one device, such as telephone **124** to send the data stream to, then the name or address of telephone

Docket No. 11032RR

124 will be sent back to SIP Proxy 170, which will then redirect the call to telephone 124. The user may select more than one device to send the data streams to as well. If the data stream consists of multiple data types, the user may instruct SIP Proxy 170 to send each data stream to a different type of device.

5 Furthermore, the user may instruct SIP Proxy 170 to send all of the data streams to several locations (forking) such that multiple parties may be connected (such as for a conference call) or to several locations, but have only the first to “pick up” or “answer” be connected. This last alternative might be useful if the user wished to redirect the data stream to another person, but was unsure of that person’s location
10 but did know of several possible locations of that person.

To help illustrate the present invention, consider the following example of a user’s device receiving multiple types of data streams at a single device. For example, a user might have registered their personal digital assistant as the device to which to have incoming data streams routed. The SIP Proxy 170 receives an
15 incoming data stream intended for this user and generates and routes a message to the user indicating the types of message streams and from what party. The types of message streams include audio, video (in MPEG format), text and a JPEG picture. The user of the personal digital assistant might decide to route the audio to speakers or to a telephone such as telephone 124, route the video to a desktop
20 computer such as client 120 or to a television attached to a set top box, the text routed to a printer (perhaps connected to client 120), and the JPEG picture routed to a second computer such as client 126 or to a device dedicated to generating and displaying still pictures. Thus, each of the data streams were directed to a device which was best able to utilize and present the information to the user.

25 To illustrate “forking”, consider a person receiving a data stream (perhaps a phone call, but not necessarily). The person after determining what the data stream is and/or who it is from, decides that other people within an organization should participate as well. The person would then enter several names or addresses for the SIP Proxy 170 to use to redirect the data stream. This list of
30 several names could include the user originally receiving the notification. In that way several people could participate, such as on a conference call.

Docket No. 11032RR

In yet another example of forking, the user could receive notification of an incoming call and determine that that call was for another person. However, the user does not know the exact location of the other person, but does know of several locations where that person might be. The user in this case would enter
5 several location names and instruct the proxy to redirect the call to each of them and connect the location which "picked up" first. In that manner the call is forwarded to the correct party even though the user receiving the notification knew no more than several possibilities of locations.

Although the present invention has been described primarily with
10 reference to presenting call notification information to the called party through means of a display, other methods are also possible. Such methods include, but are not limited to, notifying the called party of an incoming call through the use of sounds or through a voice synthesizer if the portable device supported such options. Furthermore, as another option, the portable computing device could
15 vibrate to indicate that the user had an incoming call. The use of sounds and vibrations could also be used to alert the called party of an incoming call such that they could direct their attention to a visual display which would indicate the nature and origin of the call.

Although described primarily with reference to SIP, an SIP proxy and an
20 SIP user agent, other communications initiation and routing protocols, such as H.323 Protocol, can be utilized as well. Furthermore, other text based or XML based protocols may be utilized rather than HTTP and HTML. Examples of other protocols include, but are not limited to, Voice XML (VOXML), Speech Markup Language (SML), WAP, and XHTML. In such cases the SIP user agent would be
25 replaced with a user agent which translated between the appropriate protocols.

It should be noted that although the present invention has been described with reference to utilizing a SIP proxy, a proxy of any kind is not necessary if the complete IP address of the device to which the call is to be directed is known and used. Furthermore, the SIP user agent is not necessary if all of the terminal
30 devices (e.g., portable data processing systems, personal digital assistants, phones, desk top computers, cell phones) involved in a calling process utilize SIP such that

Docket No. 11032RR

communications with the SIP proxy does not need to be facilitated with a translating user agent. In this case, the SIP proxy becomes the agent. Furthermore, the SIP proxy does not have to be a proxy. Any device or software which can perform the functionality of the SIP proxy will suffice, wherein the
5 primary functions performed by the SIP proxy are address lookup (determining the IP or other type address based on information received, i.e., converting john@nortel.com into an IP address) and redirecting calls.

It should also be noted that although the present invention has been described primarily with reference to voice calls, it applies to other types of
10 communication as well, including, but not limited to for example, video conferencing or text messages. For example, a portable computing device could receive a notification of an incoming video call or video message and a user could redirect that incoming video message to a laptop or desktop computer, a television, or other video display terminal such that the video could be viewed by
15 the called party. The device receiving the request could even suggest alternative destinations to redirect the call to based on the type of call (e.g. video, voice, text) the request corresponds to.

It is important to note that while the present invention has been described in the context of a fully functioning data processing system, those of ordinary skill
20 in the art will appreciate that the processes of the present invention are capable of being distributed in the form of a computer readable medium of instructions and a variety of forms and that the present invention applies equally regardless of the particular type of signal bearing media actually used to carry out the distribution. Examples of computer readable media include recordable-type media such a
25 floppy disc, a hard disk drive, a RAM, and CD-ROMs and transmission-type media such as digital and analog communications links.

The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be
30 apparent to those of ordinary skill in the art. For example, the present invention is not limited to SIP and Palm VII's. Other types of call initiation protocols other

Docket No. 11032RR

than SIP may be utilized. Furthermore, other types of portable devices other than Palm VII's may be utilized including, but not limited to, portable computers, laptop computers, other types of personal digital assistants (PDAs), and other handheld data processing systems. The embodiment was chosen and described in order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

Docket No. 11032RR

1

2 **CLAIMS:**

3 What is claimed is:

1 1. A method of redirecting a call from a data processing system to another
2 address, comprising the steps of:
3 receiving at a data processing system a registration notice of an incoming call
4 from a server; and
5 responsive to determination of a new address; transmitting a new address to
6 which the incoming call is to be redirected.

1 2. The method as recited in claim 1, wherein said data processing system is a
2 personal digital assistant.

1 3. The method as recited in claim 1, wherein said data processing system is a
2 laptop computer.

1 4. The method as recited in claim 1, wherein said data processing system is a
2 portable computing device.

1 5. The method as recited in claim 1, wherein said data processing system is a
2 wireless device.

1 6. The method as recited in claim 1, wherein the registration notice is a session
2 initiation protocol registration notice.

1 7. The method as recited in claim 1, wherein the incoming call comprises video
2 and the new address corresponds to a video display terminal.

Express Mail No.: EL356872801US

Docket No. 11032RR

- 1 8. The method as recited in claim 1, wherein said data processing system is a
2 wire-line connected device.

Docket No. 11032RR

- 1 9. A computer program product in computer readable media for use in a data
2 processing system for redirecting a call from a data processing system to another
3 address, the computer program product comprising:
4 first instructions for receiving at a data processing system a registration notice
5 of an incoming call from a server; and
6 second instructions, responsive to determination of a new address; for
7 transmitting a new address to which the incoming call is to be redirected.
- 1 10. The computer program product as recited in claim 9, wherein said data
2 processing system is a personal digital assistant.
- 1 11. The computer program product as recited in claim 9, wherein said data
2 processing system is a laptop computer.
- 1 12. The computer program product as recited in claim 9, wherein said data
2 processing system is a portable computing device.
- 1 13. The computer program product as recited in claim 9, wherein said data
2 processing system is a wireless device.
- 1 14. The computer program product as recited in claim 9, wherein the registration
2 notice is a session initiation protocol registration notice.
- 1 15. The computer program product as recited in claim 9, wherein the incoming
2 call comprises video and the new address corresponds to a video display terminal.
- 1 16. The computer program product as recited in claim 9, wherein said data
2 processing system is a wire-line connected device.

Docket No. 11032RR

- 1 17. A system of redirecting a call from a data processing system to another
2 address, comprising:
3 means for receiving at a data processing system a registration notice of an
4 incoming call from a server; and
5 means, responsive to determination of a new address; for transmitting a new
6 address to which the incoming call is to be redirected.
- 1 18. The system as recited in claim 17, wherein said data processing system is a
2 personal digital assistant.
- 1 19. The system as recited in claim 17, wherein said data processing system is a
2 laptop computer.
- 1 20. The system as recited in claim 17, wherein said data processing system is a
2 portable computing device.
- 1 21. The system as recited in claim 17, wherein said data processing system is a
2 wireless device.
- 1 22. The system as recited in claim 17, wherein the registration notice is a session
2 initiation protocol registration notice.
- 1 23. The system as recited in claim 17, wherein the incoming call comprises video
2 and the new address corresponds to a video display terminal.
- 1 24. The system as recited in claim 17, wherein said data processing system is a
2 wire-line connected device.

Docket No. 11032RR

- 1 25. A method for redirecting calls to a data processing system to a second
2 location; comprising the steps of:
3 sending a registration notification to a called party's preferred location; and
4 responsive to receipt of a new address from the called party, redirecting the
5 incoming call to the new address.
- 1 26. The method as recited in claim 25, further comprising:
2 prior to said sending step, receiving a request to initiate a call with a called
3 party; and
4 determining a preferred location of the called party.
- 1 27. The method as recited in claim 25, wherein the registration notification is a
2 session initiation protocol registration.
- 1 28. The method as recited in claim 25, wherein the preferred location is a personal
2 digital assistant.
- 1 29. The method as recited in claim 28, wherein the personal digital assistant is a
2 Palm VII utilizing a Palm Query Application to provide a user interface.
- 1 30. The method as recited in claim 25, wherein the new address corresponds to a
2 voice mailbox.
- 1 31. The method as recited in claim 25, wherein the new address corresponds to
2 placing the incoming call on hold.
- 1 32. The method as recited in claim 25, wherein communication with the preferred
2 device is provided utilizing a wireless application protocol.

1 33. The method as recited in claim 25, wherein the new address corresponds to a
2 wire-line device.

Docket No. 11032RR

- 1 34. A computer program product in computer readable media for use in a data
2 processing system for redirecting calls to a data processing system to a second
3 location; the computer program product comprising:
4 first instructions for sending a registration notification to a called party's
5 preferred location; and
6 second instructions, responsive to receipt of a new address from the called
7 party, for redirecting the incoming call to the new address.
- 1 35. The computer program product as recited in claim 34, further comprising:
2 prior to said sending step, third instructions for receiving a request to initiate a
3 call with a called party; and
4 fourth instructions for determining a preferred location of the called party.
- 1 36. The computer program product as recited in claim 34, wherein the registration
2 notification is a session initiation protocol registration.
- 1 37. The computer program product as recited in claim 34, wherein the preferred
2 location is a personal digital assistant.
- 1 38. The computer program product as recited in claim 37, wherein the personal
2 digital assistant is a Palm VII utilizing a Palm Query Application to provide a user
3 interface.
- 1 39. The computer program product as recited in claim 34, wherein the new
2 address corresponds to a voice mailbox.
- 1 40. The computer program product as recited in claim 34, wherein the new
2 address corresponds to placing the incoming call on hold.

Express Mail No.: EL356872801US

Docket No. 11032RR

1 41. The computer program product as recited in claim 34, wherein
2 communication with the preferred device is provided utilizing a wireless application
3 protocol.

1 42. The computer program product as recited in claim 34, wherein the new
2 address corresponds to a wire-line device.

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2

Docket No. 11032RR

- 1 43. A system for redirecting calls to a data processing system to a second
2 location; comprising:
3 means for sending a registration notification to a called party's preferred
4 location; and
5 means, responsive to receipt of a new address from the called party, for
6 redirecting the incoming call to the new address.
- 1 44. The system as recited in claim 43, further comprising:
2 prior to said sending step, means for receiving a request to initiate a call with a
3 called party; and
4 means for determining a preferred location of the called party.
- 1 45. The system as recited in claim 43, wherein the registration notification is a
2 session initiation protocol registration.
- 1 46. The system as recited in claim 43, wherein the preferred location is a personal
2 digital assistant.
- 1 47. The system as recited in claim 46, wherein the personal digital assistant is a
2 Palm VII utilizing a Palm Query Application to provide a user interface.
- 1 48. The system as recited in claim 43, wherein the new address corresponds to a
2 voice mailbox.
- 1 49. The system as recited in claim 43, wherein the new address corresponds to
2 placing the incoming call on hold.
- 1 50. The system as recited in claim 43, wherein communication with the preferred
2 device is provided utilizing a wireless application protocol.

Express Mail No.: EL356872801US

Docket No. 11032RR

- 1 51. The system as recited in claim 43, wherein the new address corresponds to a
- 2 wire-line device.

11032RR

Docket No. 11032RR

- 1 52. A method in a communications system for processing a call, the method
2 comprising:
3 receiving at a mobile data processing system a call for a user;
4 sending a first request to setup the call to the mobile data processing system
5 associated with a user, wherein the mobile data processing system has a wireless
6 communications capability;
7 receiving a response to the request, wherein the response includes an address
8 for the call; and
9 sending a second request to setup the call to the user using the address.
- 1 53. The method as recited in claim 52, wherein the data processing system is a
2 personal digital assistant.
- 1 54. The method as recited in claim 52, wherein the personal digital assistant is a
2 Palm VII.
- 1 55. The method as recited in claim 52, wherein the request and the response are
2 session initiation protocol messages.

Docket No. 11032RR

- 1 56. A method for processing a call at a data processing system the method
2 comprising:
3 receiving a request to establish a call;
4 presenting caller information at the data processing system; and
5 responsive to an identification of an address for the call, returning a response
6 including the address.
- 1 57. The method as recited in claim 56, wherein the step of presenting caller
2 information comprises displaying the caller information.
- 1 58. The method as recited in claim 56, wherein the step of presenting caller
2 information comprises presenting the caller information audibly.
- 1 59. The method as recited in claim 56, wherein the request and the response are
2 session initiation protocol messages.
- 1 60. The method as recited in claim 56, wherein the data processing system is a
2 wireless device.
- 1 61. The method as recited in claim 56, wherein the step of presenting caller
2 information comprises a vibrating alert.
- 1 62. The method as recited in claim 56, wherein the data processing system is a
2 two-way pager.

Docket No. 11032RR

63. A communications network for redirecting communications; comprising:
a proxy server for performing address lookup and directing calls;
a user agent functionally connected to the aid proxy server to provide protocol
translation between a protocol recognized by the proxy server and a protocol
5 recognized by a terminal unit and to provide a communication link between the proxy
server and the terminal unit; wherein
the proxy server, responsive to an indication from the terminal unit to redirect
a call, redirects calls to a new location.
64. The network as recited in claim 63, wherein the proxy server is a session
10 initiation protocol proxy server and the user agent is a session initiation protocol user
agent for translating between session initiation protocol and a second protocol.
65. The network as recited in claim 64, wherein the second protocol is HTML.

Docket No. 11032RR

66. A method for initiating calls, comprising the steps of:
receiving registration notice of an incoming call, wherein said registration
notice is formatted in a first protocol;

5 translating said registration notice from the first protocol into a second
protocol; and
transmitting a modified registration notice to a terminating device; wherein
the modified registration notice is formatted in the second protocol.

67. The method as recited in claim 66, further comprising:
receiving a location data with which to redirect the incoming call from the
10 terminating device; wherein the location data is formatted in the second protocol; and
translating the location data to a second location data; and
transmitting the second location data, wherein the second location data is
formatted in the second protocol.


68. The method as recited in claim 66, wherein the first protocol is a session
15 initiation protocol.

69. The method as recited in claim 66, wherein the second protocol is a hypertext
markup language.

Docket No. 11032RR

ABSTRACT OF THE DISCLOSURE**PORTABLE CALL MANAGEMENT SYSTEM**

- 5 A method of redirecting a call from a data processing system to another address. In a preferred embodiment, a notice of an incoming call received from a server at a data processing system. This notice may include caller identification information as well. The user of the data processing system is prompted for an address to which the user wishes the call to be redirected. The user then identifies
- 10 and sends to the server a new address to which the incoming call is to be redirected. The server then redirects the call to the new address.

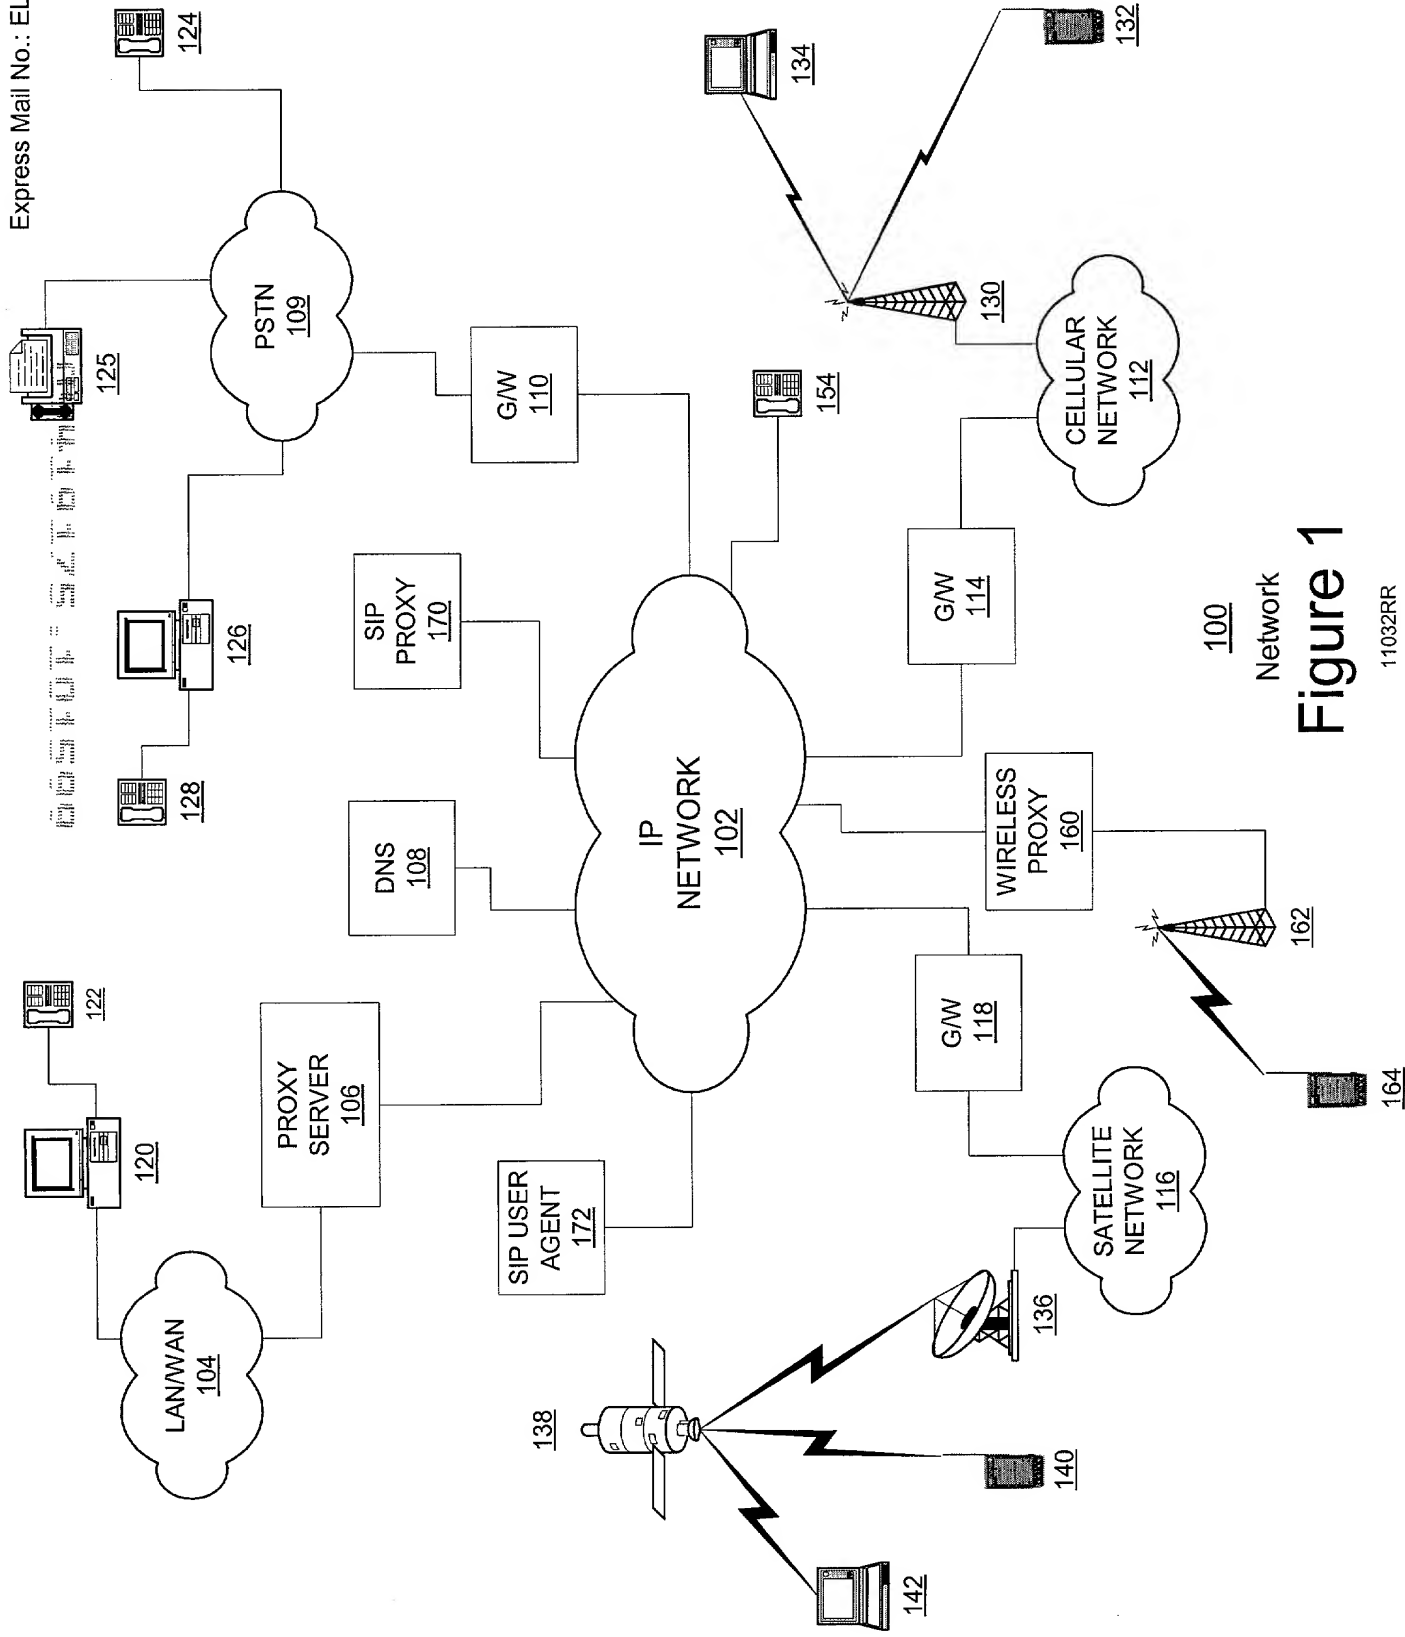

100 Network
Figure 1

11032RR



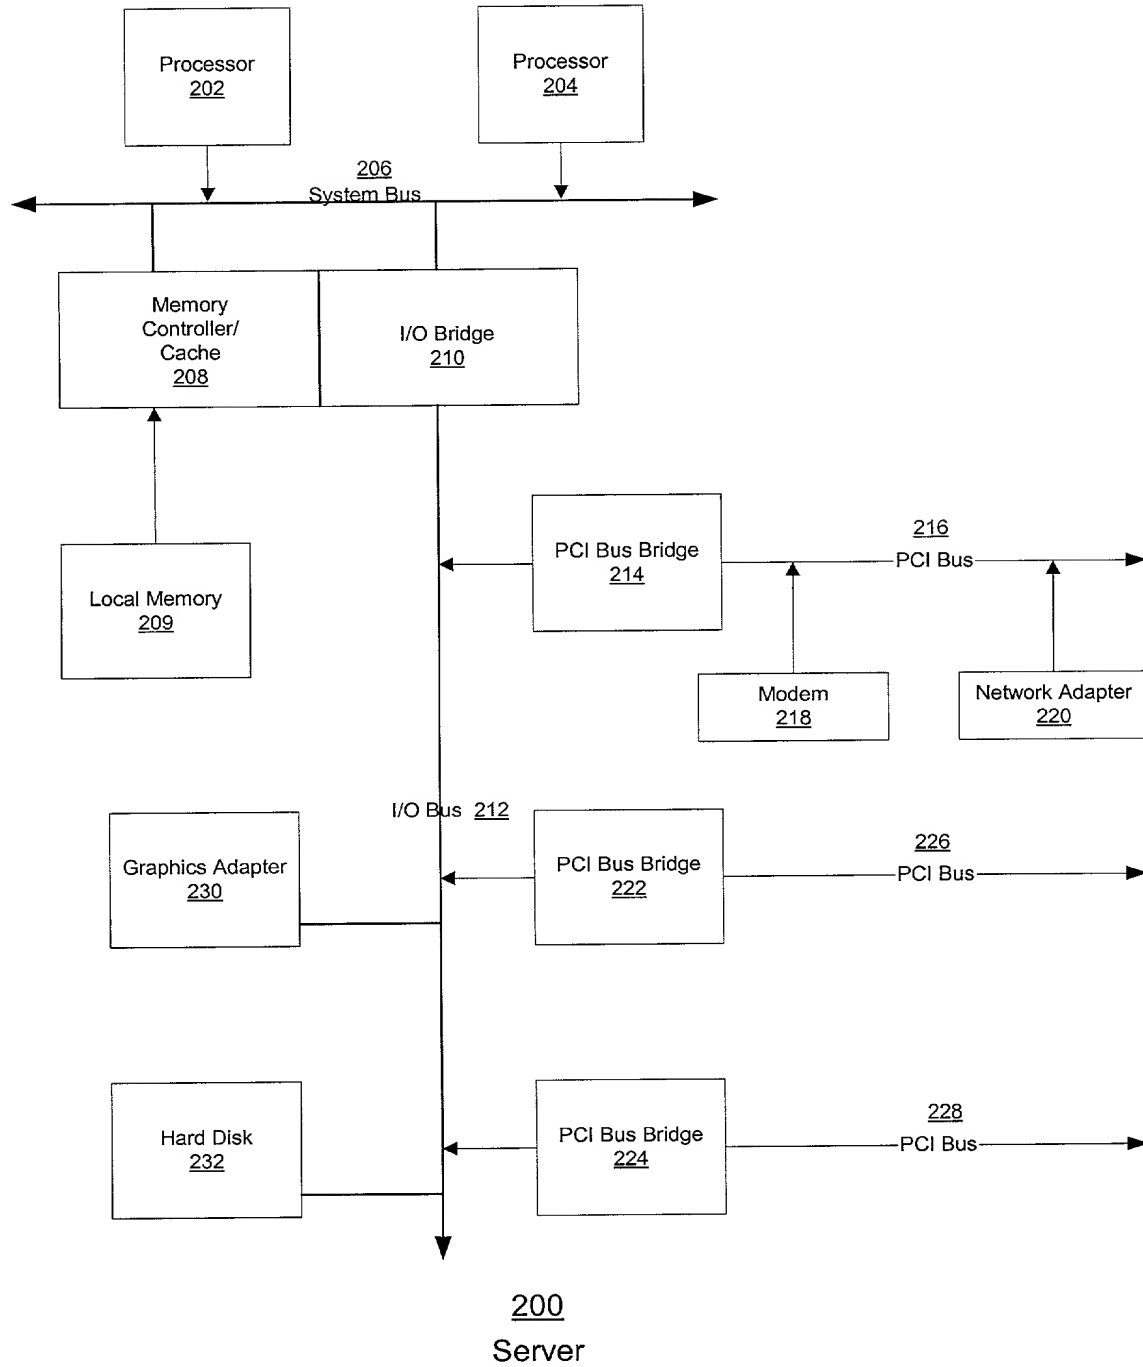


Figure 2

11032RR

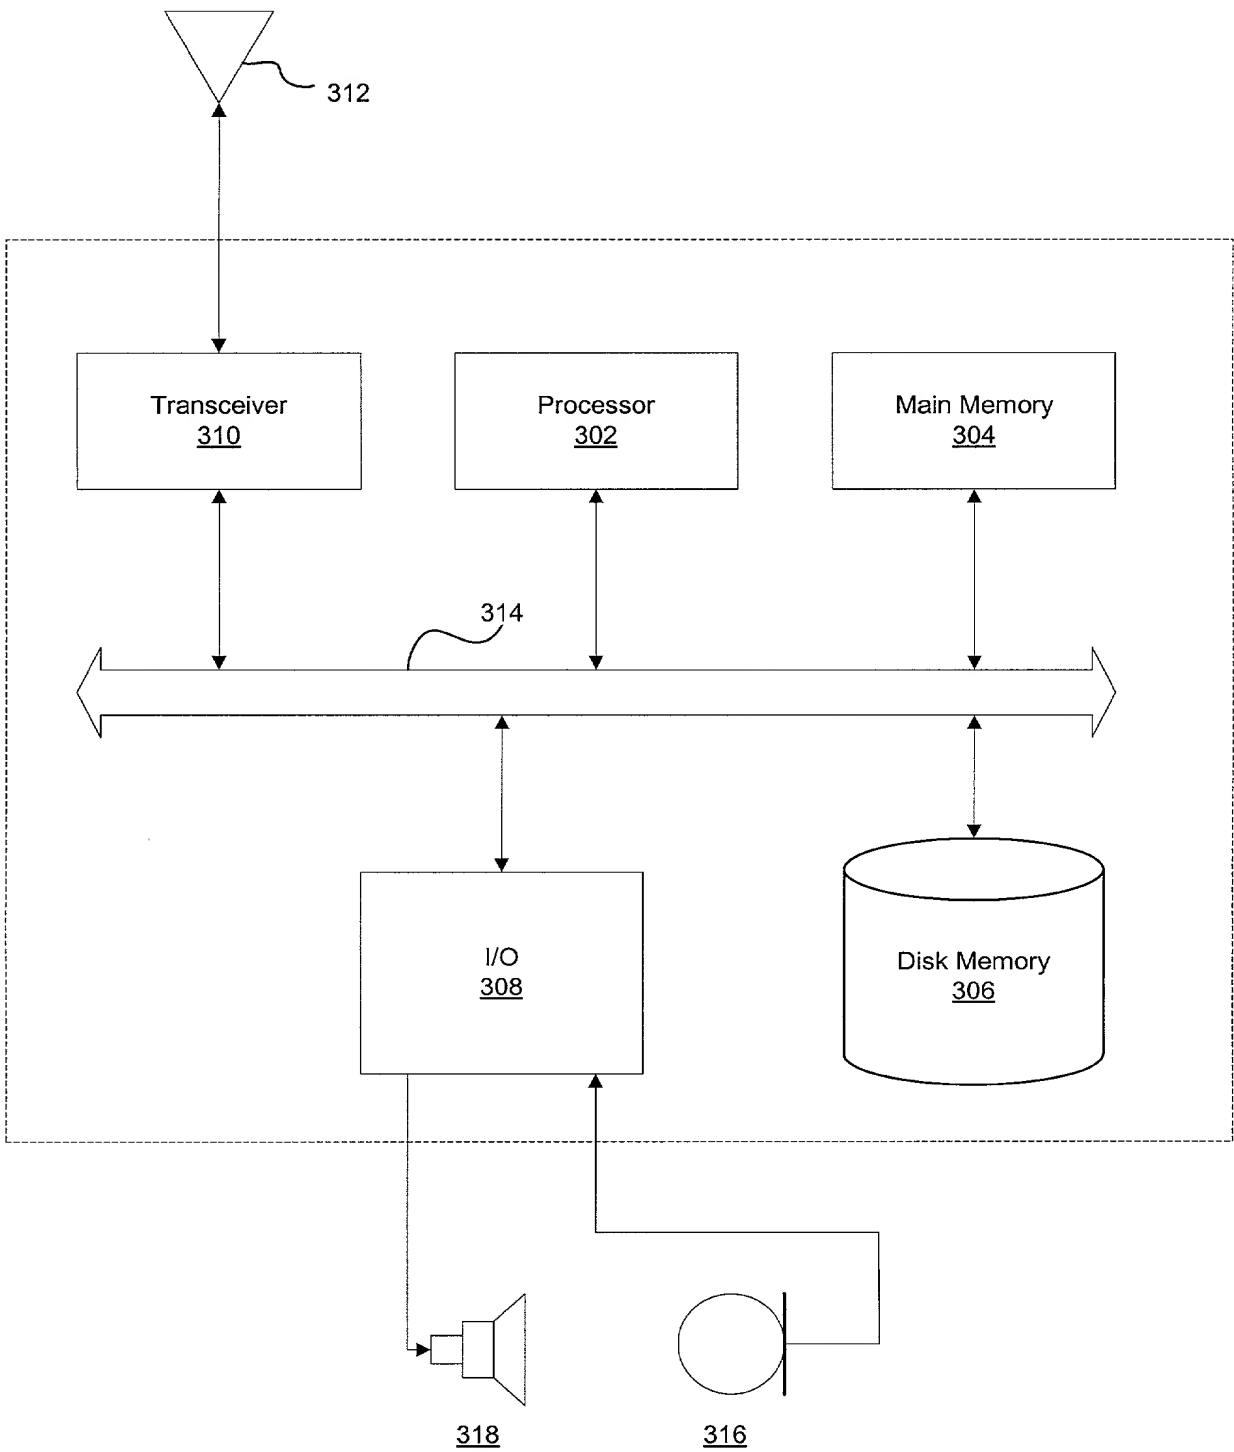

300
Figure 3
11032RR

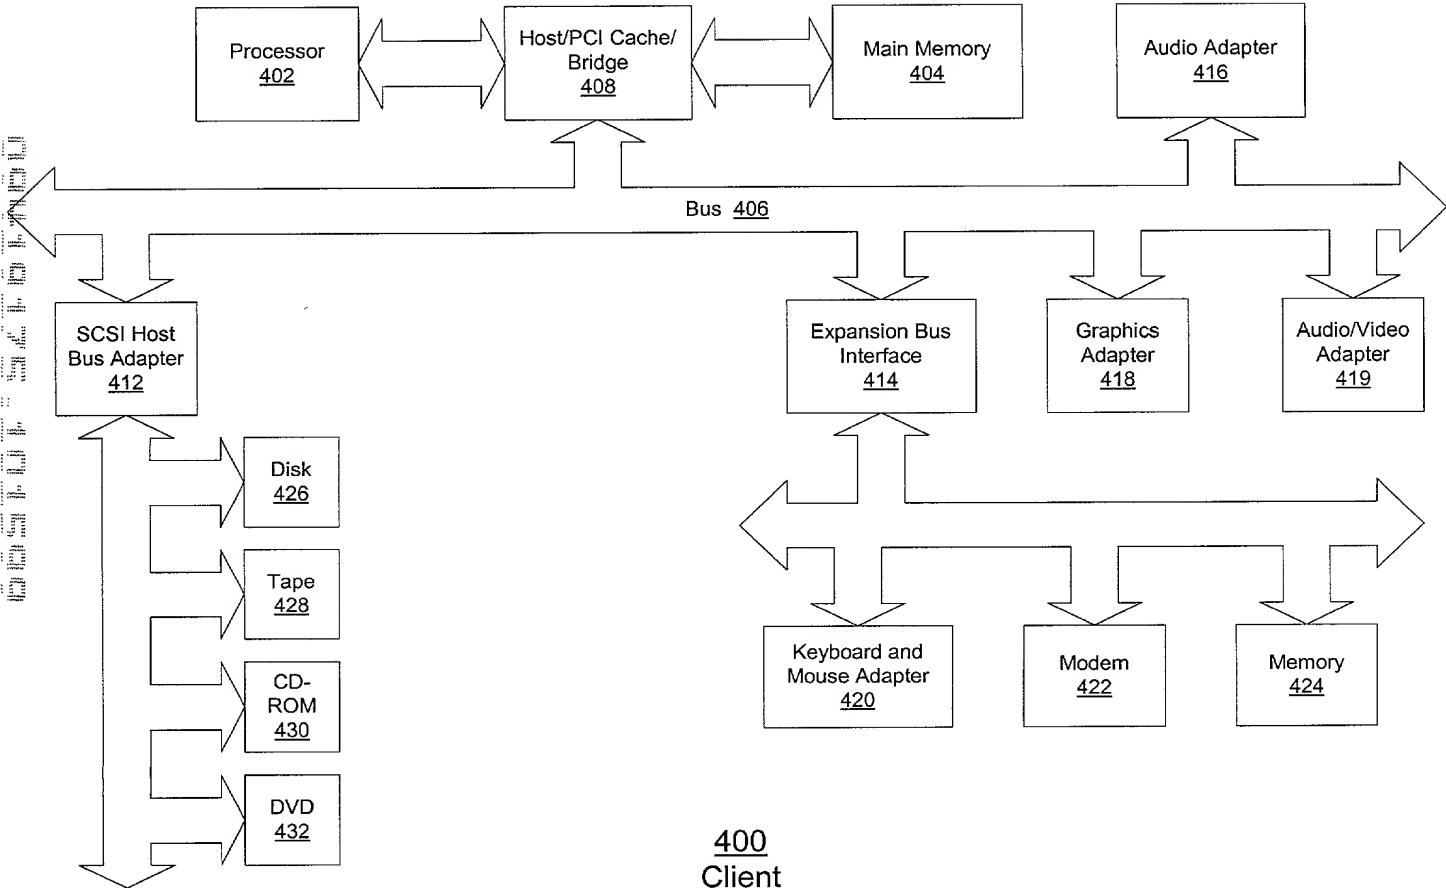

400
Client
Figure 4
11032RR

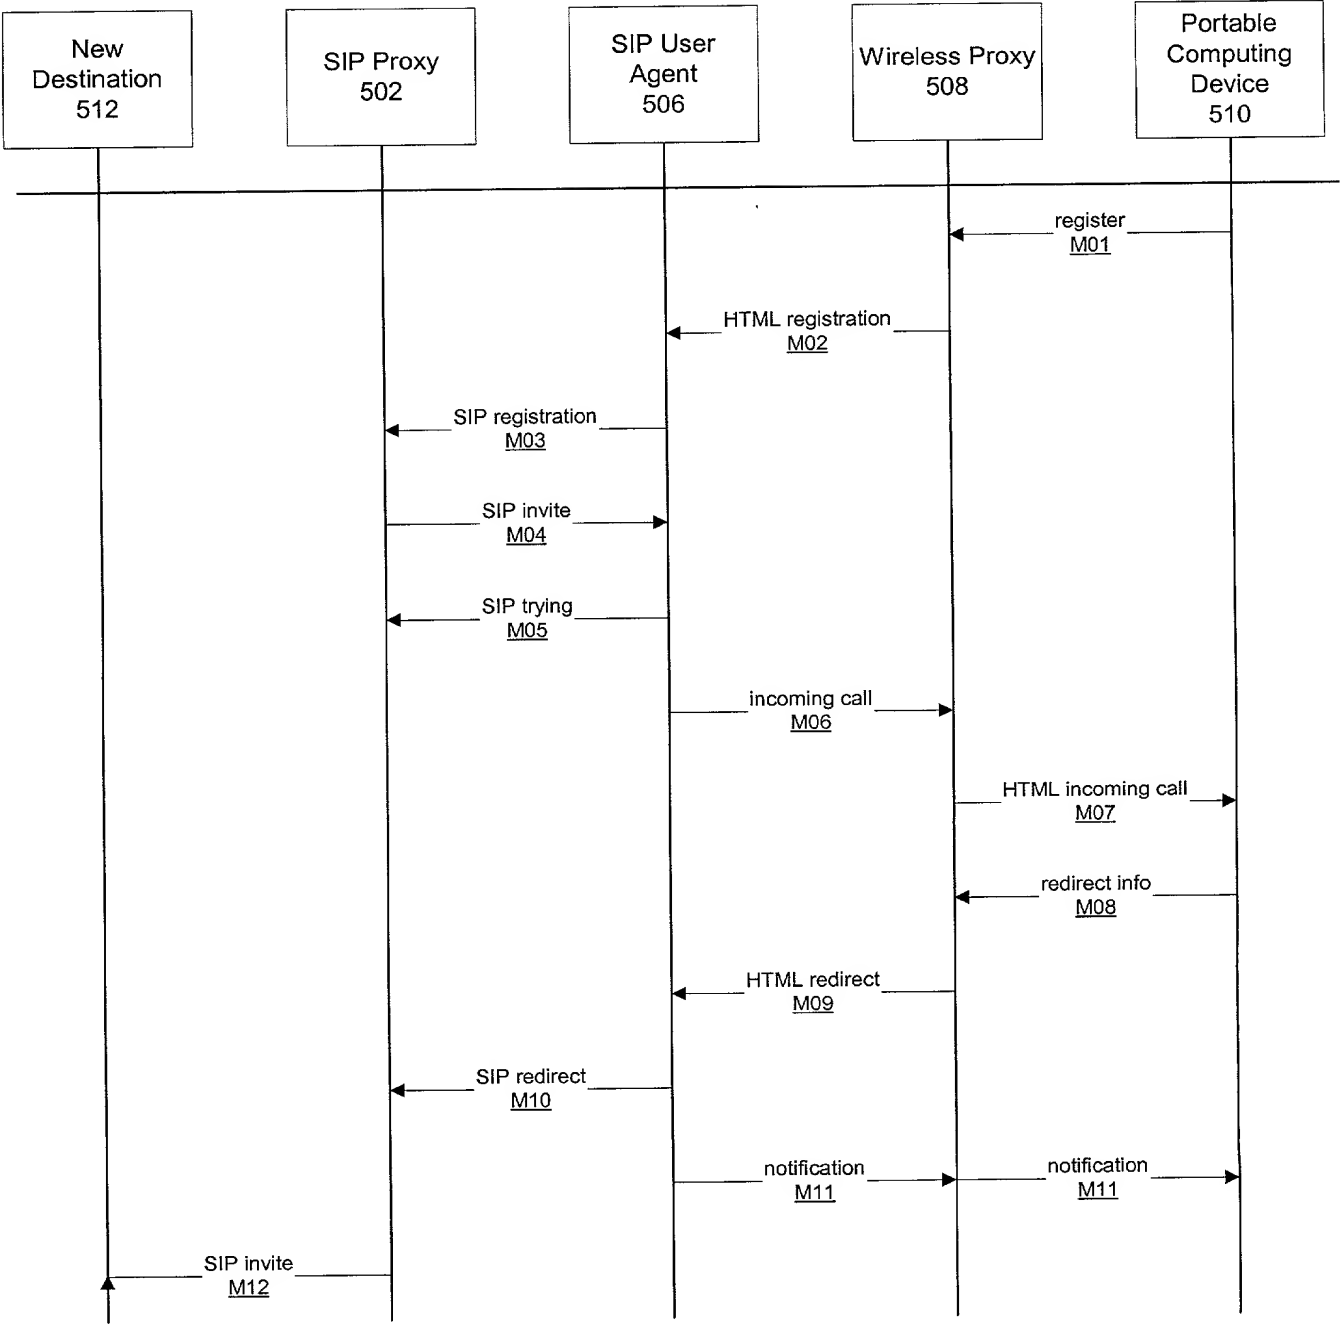


Figure 5
11032RR

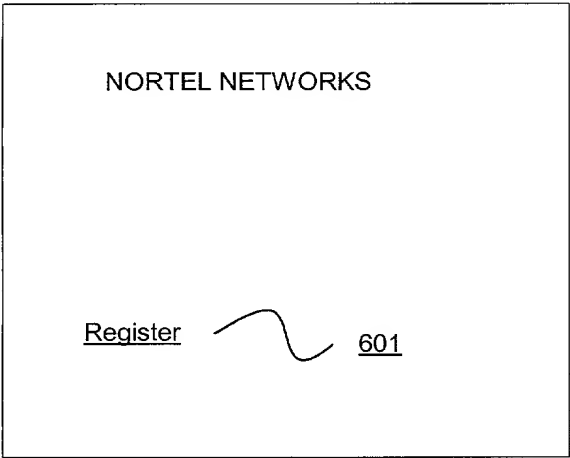


Figure 6A

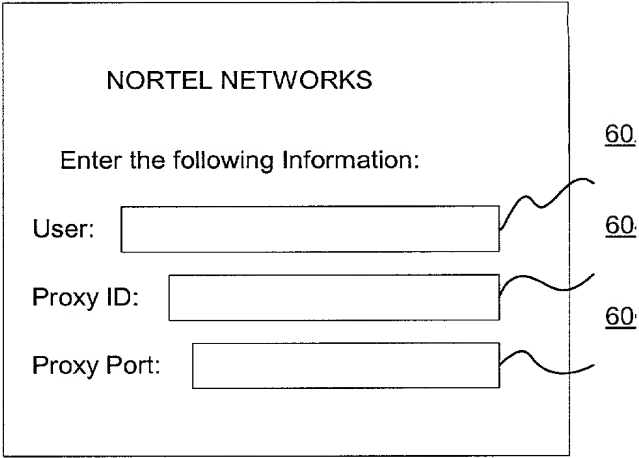


Figure 6B

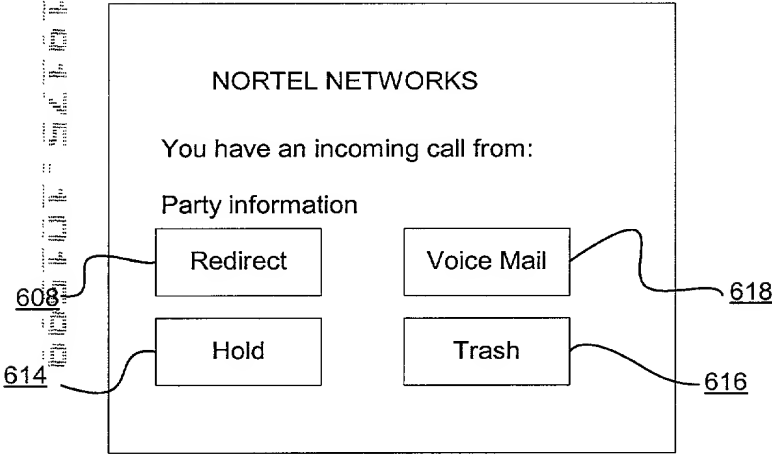


Figure 6C

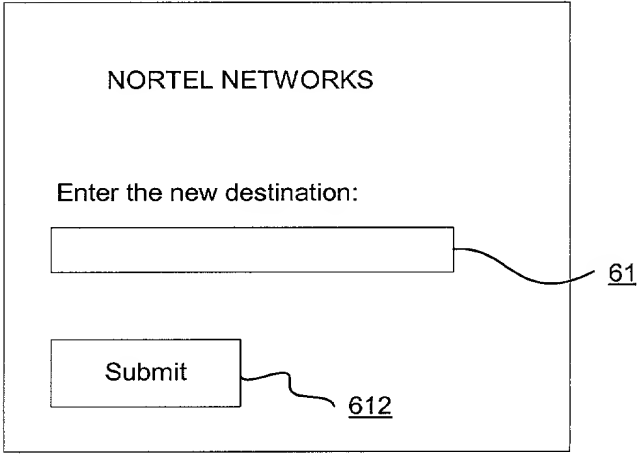


Figure 6D

11032RR

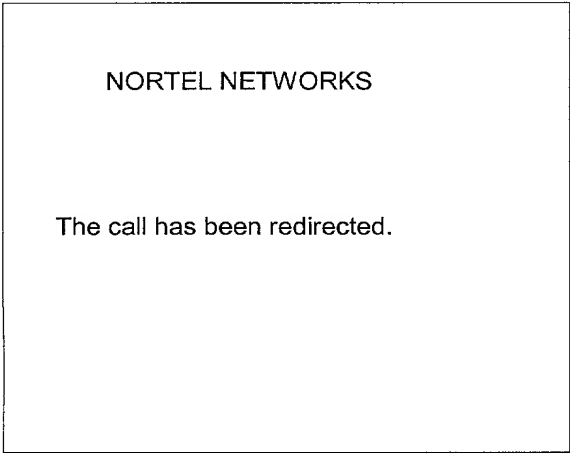


Figure 6E

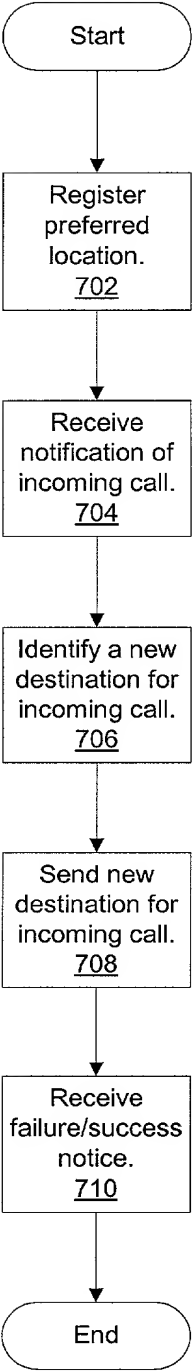


Figure 7
11032RR

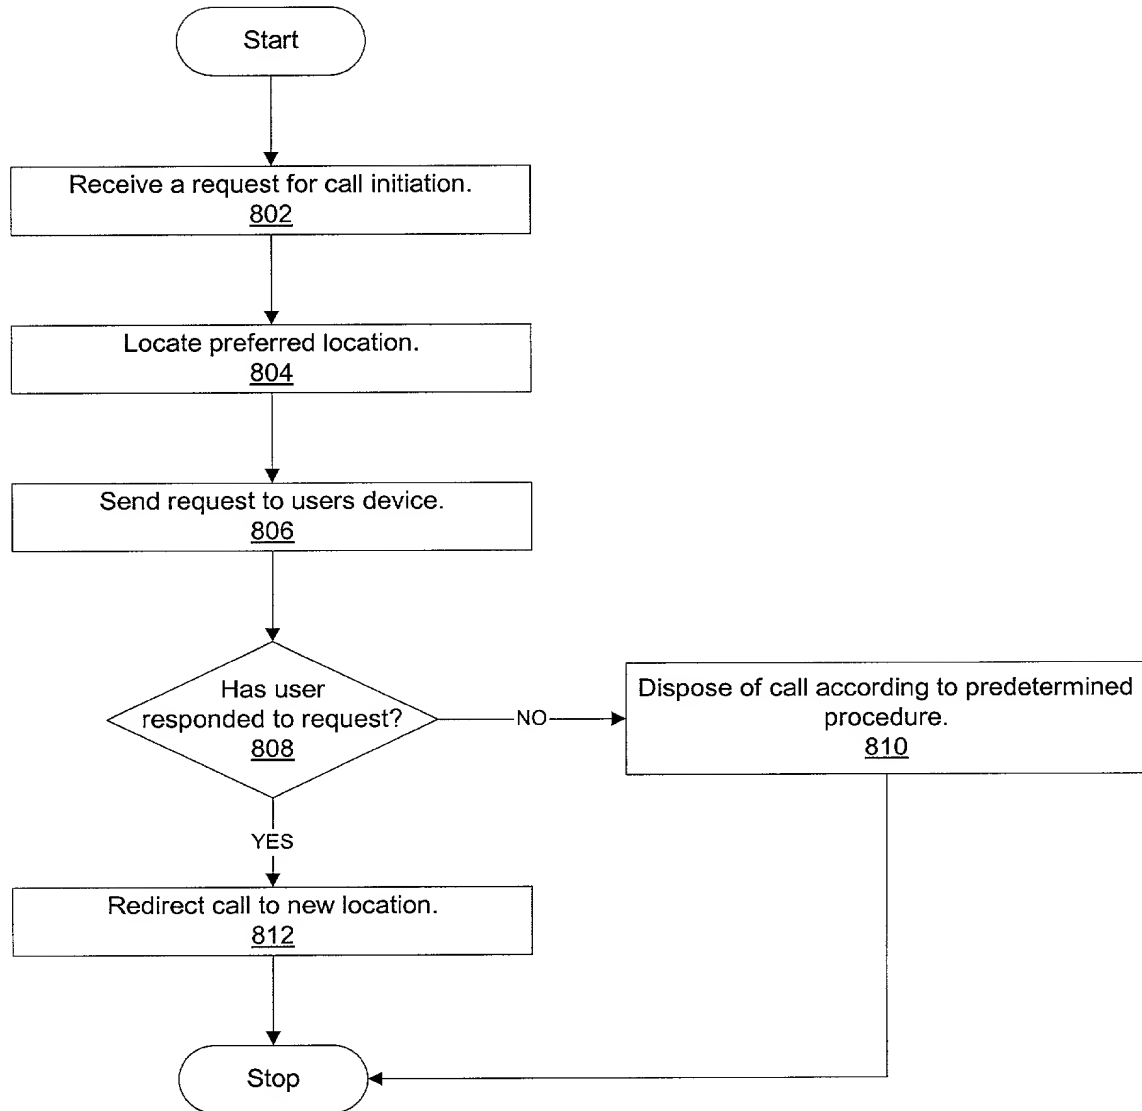


Figure 8

11032RR

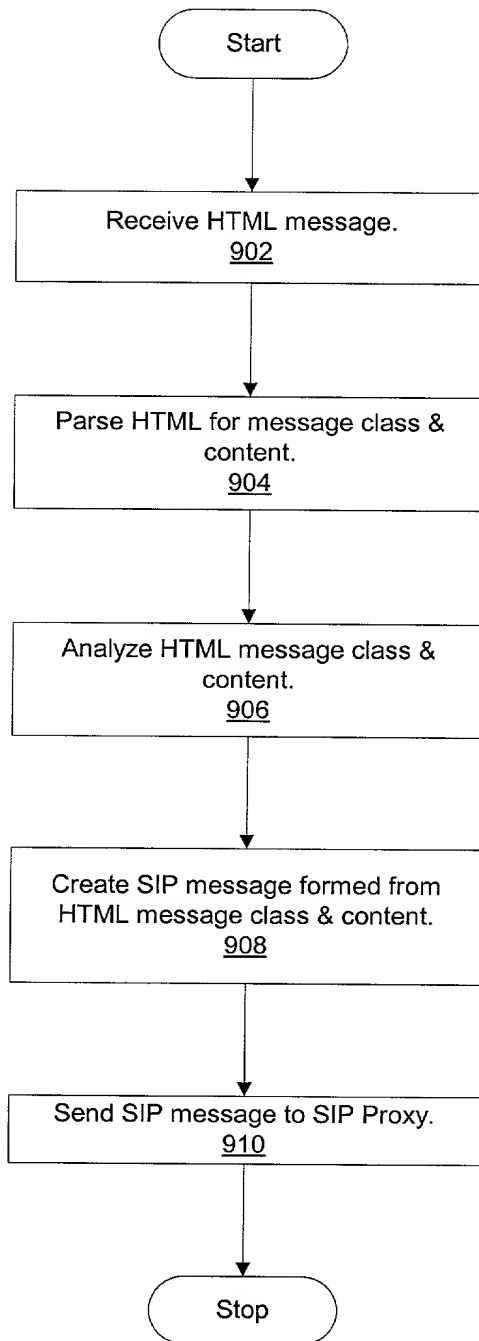


Figure 9

11032RR

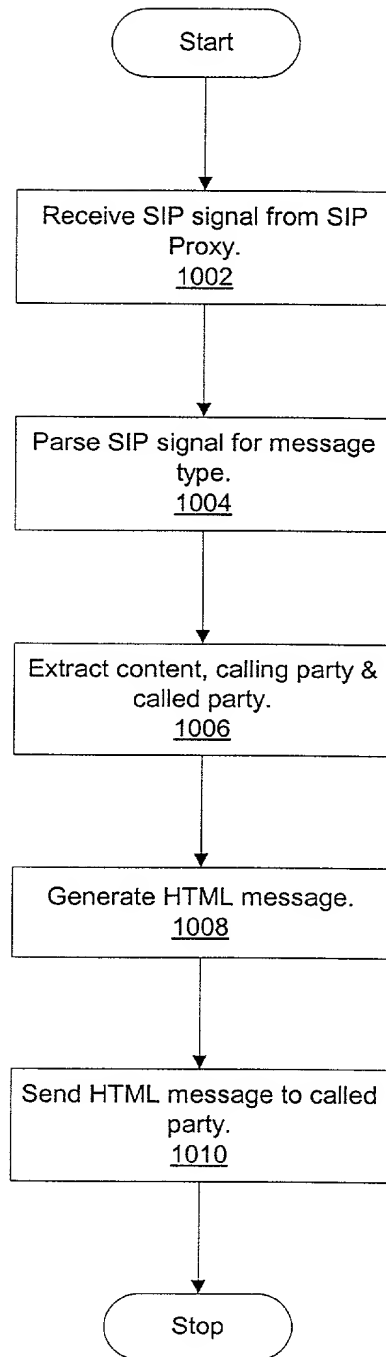


Figure 10

11032RR

Docket Number: 11032RR

Page 1 of 3

**DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION**

As below named inventor, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name;

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, which is described in the specification of which: (check one)

☒ filed herewith under Attorney's Docket Number 11032RR

PORTABLE CALL MANAGEMENT SYSTEM

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 CFR 1.56.

I hereby claim the benefit under Title 35 United States Code section 120 of the provisional application filed under 111b of this title as listed below:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine of imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY. As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John D. Crane, Reg. No. 25,231;
Christopher O. Edwards, Reg. No. 36,127; Robert C. Klinger, Reg. No. 34,365;
James A. Harrison, Reg. No. 40,401; W. Glen Johnson, Reg. No. 39,525; Duke W. Yee, Reg. No. 34,285;
Rudolph J. Buchel, Reg. No. 43,448; Joseph R. Burwell, Reg. No. 44,468; Stephen R. Loe, Reg. No. 43,757.

Send correspondence to John D. Crane, Nortel Networks Corporation, Patent Department; P.O. Box 833858, Mail Stop 468/05/B10; Richardson, Texas 75083-3858 and direct all telephone calls to John D. Crane, telephone: (972) 695-8442.

=====

(1) FULL NAME OF INVENTOR: Gregory T. Osterhout

INVENTOR'S SIGNATURE: *Gregory T. Osterhout*

DATE: 10/15/99

RESIDENCE: 313 Falcon Court, Coppell, TX 75019

COUNTY: Dallas

CITIZENSHIP: United States

POST OFFICE ADDRESS: Same As Above

(2) FULL NAME OF INVENTOR: Kim B. Holmes

INVENTOR'S SIGNATURE: _____

DATE:

RESIDENCE: 5409 Scenic Drive, Rowlett, TX 75088

COUNTY: Dallas

CITIZENSHIP: Canada

POST OFFICE ADDRESS: Same As Above

Docket Number: 11032RR

Page 3 of 3

(3) FULL NAME OF INVENTOR: Mark Sosebee

INVENTOR'S SIGNATURE: _____

DATE:

RESIDENCE: 920 Goodwin Drive, Plano, TX 75023

COUNTY: Collin

CITIZENSHIP: United States

POST OFFICE ADDRESS: Same As Above